

Contact

Copper LAN Product Inquiry
Phone: 717-354-6200
berktek.support@nexans.com

LANmark-10G FTP Category 6a, F/UTP Riser

Berk-Tek's LANmark-10G FTP is ideal for applications that require the most advanced cable performance and the additional signal isolation advantages of an F/UTP design. The Berk-Tek design incorporates one overall foil shield rather than individually shielding each twisted pair. Having one overall shield reduces the time needed for cable termination, provides a smaller outside diameter and reduces costs.

Description

Construction:

23 AWG, bare copper wire insulated with PE. Two insulated conductors twisted together with varying lays to form a pair and four pairs laid up to form the basic unit. The cable is shielded with an overall polyester/aluminum foil with 26 AWG stranded tinned copper drain wire and ripcord and jacketed in polymer alloy.

Standards:

- North American ANSI/TIA/EIA-568-B.2-10, Category 6A and UL444 & C22.2 No.214-02
- International: EU Directive 2002/95/EC (RoHS)

Flame Rating:

- Riser-NFPA 70
- UL listed (US & Canada) as NEC Type CMR

Applications:

LANmark-10G FTP cable is intended for high speed data applications up to 500 MHz including:


IEEE 802.3	10GBASE-T	10 Gb/s
IEEE 802.3	1000BASE-T	1 Gb/s
TIA/EIA-854	1000BASE-TX	1 Gb/s
ATM	155 Mb/s	155 Mb/s
IEEE 802.3	100 BASE-TX	100 Mb/s
CDDI		100 Mb/s

Features:

- ETL verified to TIA/EIA-568-B.2-10 Category 6a
- Outstanding signal isolation
- Superior alien crosstalk performance

Benefits:

- Increased signal isolation prevents contaminant noise from entering cabling system
- Completely compliant with IEEE requirements
- Lower bit errors resulting in increased network performance

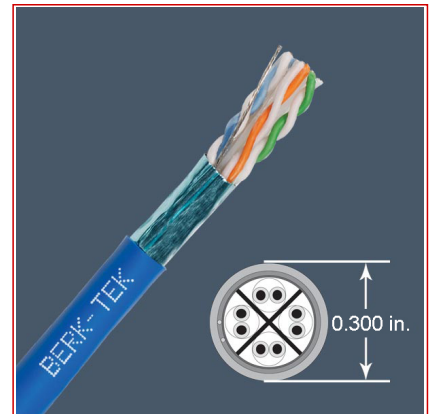

Standards

National TIA/EIA-568-B.2-10;
UL 444

LANmark-10G FTP Category 6a, F/UTP Riser

Characteristics

Dimensional characteristics	
Length per reel	1000.0 ft
Number of pairs	4
Usage characteristics	
Packaging	Reel
Field of application	Indoor
Category	Cat. 6A
Fire safety	Riser Rated

Technical Data

Technical Data - Physical			Color Code		
			Pair-1	White	Blue
Conductor	23 AWG Bare Copper		Pair-2	White	Orange
Conductor diameter—in. (mm)	0.022	(0.56)	Pair-3	White	Green
Insulated Conductor Diameter- in. (mm)	0.044	(1.12)	Pair-4	White	Brown
Cable diameter—in. (mm)	0.28	(7.11)			
Nominal cable weight—lb./kft. (kg/km)	38	(17.24)	Temperature Rating		
Max. installation tension—lb. (N)	25	(110)	Installation	0°C to +50°C	
Min. bend radius—in. (mm)	1.2	(30.48)	Operation	-20°C to +60°C	

Technical Data - Parametric Measurements

Mutual Capacitance	5.6 nF/100 m max.
DC resistance	9.38 Ohms/100 m max.
Skew	45 ns/100 m max.
Pair to ground Unbalance	330 pF/100 m max.
Velocity of Propagation	66% nom. Riser
DC Resistance Unbalance of a Pair	4% max.
Transfer Impedance	45 mOhms/m @ 10 MHz
Coupling Attenuation	75 dB @ 30 MHz

LANmark-10G FTP Category 6a, F/UTP Riser

Technical Data - Electrical Characteristics

FREQ MHz	SRL (dB)	RL (dB)	IL (dB/100m)	PS-NEXT (dB)	NEXT (dB)	ACR (dB@100m)	PS-ACR (dB@100m)
	min.	min.	max.	min.	min.	min.	min.
1	NA	20.0	2.1	72.3	74.3	72.2	70.2
4	NA	23.0	3.8	63.3	65.3	61.5	59.5
10	25.0	24.5	5.9	57.3	59.3	53.4	51.4
16	25.0	25.0	7.5	54.3	56.3	48.8	46.8
20	25.0	25.0	8.4	52.8	54.8	46.4	44.4
31.25	23.6	23.6	10.5	49.9	51.9	41.4	39.4
62.5	21.5	21.5	15.0	45.4	47.4	32.4	30.4
100	20.1	20.1	19.1	42.3	44.3	25.2	23.2
250	17.3	17.3	31.1	36.3	38.3	7.2	5.3
350	16.3	16.3	37.2	34.2	36.2	—	—
500	15.2	15.2	45.3	31.8	33.8	—	—
600	14.7	14.7	50.1	30.6	32.6	—	—
750	14.0	14.0	56.7	29.2	31.2	—	—

Technical Data - Electrical Characteristics

FREQ MHz	ACRF (dB)	PS-ACRF (dB)	PS-ANEXT (dB)	PS-AACRF (dB)	LCL/TCL (dB)	EL TCTL (dB)
	min.	min.	min.	min.	min.	min.
1	67.8	64.8	67	67	50.0	35.0
4	55.7	52.7	67	66.2	44.0	23.0
10	47.8	44.8	67	58.2	40.0	15.0
16	43.7	40.7	67	54.1	38.0	10.9
20	41.7	38.7	67	52.2	37.0	9.0
31.25	37.9	34.9	67	48.3	35.1	5.5
62.5	31.8	28.8	65.6	42.3	32.0	—
100	27.8	24.8	62.5	38.2	30.0	—
250	19.8	16.8	56.5	30.2	26.0	—
350	16.9	13.9	54.3	27.3	24.6	—
500	13.8	10.8	52	24.2	23.0	—
600	12.2	9.2	50.8	22.6	22.2	—
750	10.3	7.3	49.3	20.7	21.2	—

Electrical Characteristics above 500 MHz are for engineering information

LANmark-10G FTP Category 6a, F/UTP Riser

Product List

☎=Make to order, 📦=Make to stock

Part Number	Description	Colour
📦 10189092 New	LANmark-10G FTP Category 6a, F/UTP Riser	Green
📦 10189567 New	LANmark-10G FTP Category 6a, F/UTP Riser	Blue
📦 10189798 New	LANmark-10G FTP Category 6a, F/UTP Riser	Grey
📦 10189803 New	LANmark-10G FTP Category 6a, F/UTP Riser	Yellow
📦 10189801 New	LANmark-10G FTP Category 6a, F/UTP Riser	White
📦 10189804 New	LANmark-10G FTP Category 6a, F/UTP Riser	Red

☎ = Make to order, 📦 = Make to stock

Selling delivery information

PLEASE NOTE: In the interest of product improvement, Berk-Tek, a Nexans company may make improvements or changes in the products, the programs or services described at any time without notice. Additionally, the information contained herein may include typographical errors or technical inaccuracies. Changes will be periodically made to address any such issues.